


SINGLE CHANNEL MAXI RANGE**REF: CVC-PB-E**

Pumping station for rain and waste water is manufactured in accordance with the UN-EN-12050-1 Standard.

The basic model consists of a case made of Glass Fiber Reinforced Polyester (GFRP), 2 pumps operating alternately, 4 level regulators, check valves and lock valves. The automatic coupling for the pumps enables its lifting when the deposit is full.

Optional: panel board and accessories.

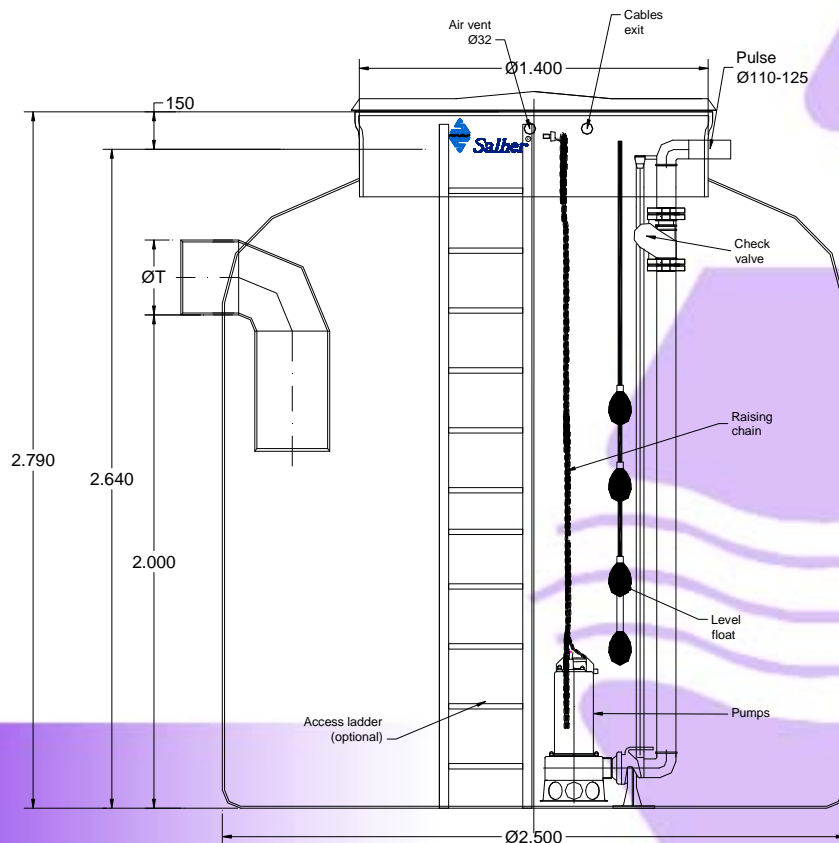

REF.	Total Capacity [liters]	Efficiency Capacity [liters]	REF. PUMP	Pumps Units/kW /tension	Ø [mm]	Height [mm]	Ø T [mm]
CVC-PB-E-21	11.800	9.800	17	5,5 kW III	2.500	2.790	110-300
CVC-PB-E-22	11.800	9.800	18	7,5 kW III	2.500	2.790	110-300
CVC-PB-E-23	11.800	9.800	19	11 kW III	2.500	2.790	110-300
CVC-PB-E-24	11.800	9.800	20	15 kW III	2.500	2.790	110-300

PUMP CHARACTERISTICS: SINGLE CHANNEL IMPELLER

Pumps	Nominal Power (kW)	Tension (V)	Intensity (A)	Flow												Ø Solids Pass.	
				L/min	340	680	1.000	1350	1700	2000	2500	3000	3400	4200	5000		
17	5,5	400V T	12,6	MFC	20	40	60	80	100	120	150	180	200	250	300	98	
18	7,5	400V T	16,9	MWC		20	18	16,3	14,9	13,5	11,3	9	7,2			98	
19	11	400V T	22,8				25	23,5	22	20,2	17,8	14,8	12,7	7,2			100
20	15	400V T	30,0				31,5	29,8	28	26,1	23,6	21	19	14,1	9		100